



Model Number:

Model Name:

Style:

Designation:

Material:

Coating:

Faucet Mounting:

EKORS-COM(W)

Rettangolo Countersink



Trough Style

Commercial

Cold Fired Ceramic

EKOLI+VPTK

Wall Mount

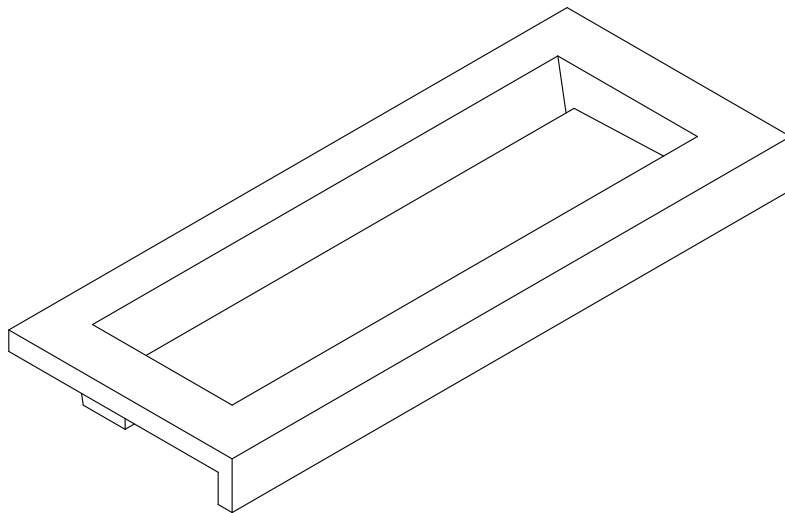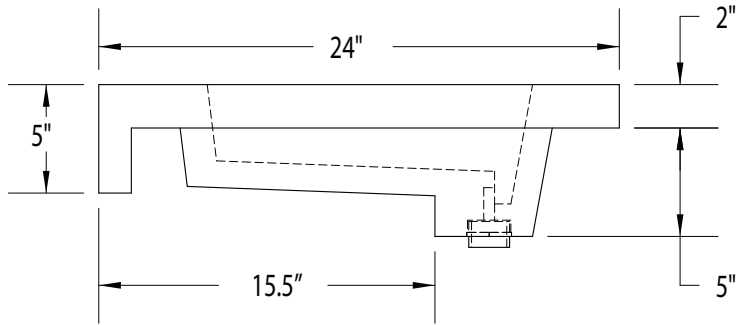

Key Features:

- ADA Compliant
- Handcrafted In USA (ARRA Compliant)
- CSA B45.8 13/IAPMO Z403 2013 Compliant
- All Natural Chemical Free
- LEED Credits - High Recycled Material Content
- EkoLi+ Stain Resistant Finish
- Custom Sizes and Styles Available

Available Options:

- Finished side aprons
 - Deck Mount Faucet Model
 - Mounting Brackets
- (See Eko Concealed Mounting Brackets)

Model Number	L x D x H	Basin Length	Drains
EKORS-COM24W	24" x 24" x 5"	14" Basin Length Standard	Single Drain
EKORS-COM36W	36" x 24" x 5"	26" Basin Length Standard	Single Drain
EKORS-COM48W	48" x 24" x 5"	38" Basin Length Standard	Single Drain
EKORS-COM60W	60" x 24" x 5"	50" Basin Length Standard	Single Drain
EKORS-COM66W	66" x 24" x 5"	56" Basin Length Standard	Single Drain
EKORS-COM72W	72" x 24" x 5"	62" Basin Length Standard	Single Drain
EKORS-COM78W	78" x 24" x 5"	68" Basin Length Standard	Single Drain
EKORS-COM84W	84" x 24" x 5"	74" Basin Length Standard	(2) Drains
EKORS-COM90W	90" x 24" x 5"	80" Basin Length Standard	(2) Drains
EKORS-COM96W	96" x 24" x 5"	86" Basin Length Standard	(2) Drains
EKORS-COM102W	102" x 24" x 5"	92" Basin Length Standard	(2) Drains
EKORS-COM108W	108" x 24" x 5"	98" Basin Length Standard	(2) Drains
EKORS-COM114W	114" x 24" x 5"	104" Basin Length Standard	(2) Drains
EKORS-COM120W	120" x 24" x 5"	110" Basin Length Standard	(2) Drains

* Custom Lengths, Widths, and Configurations Available.



Model Number:

EKORS-COM(W)

Model Name:

Rettangolo Countersink

Style:

Trough Style

Designation:

Commercial

Material:



Cold Fired Ceramic

Coating:

EKOLI+VPTK

Faucet Mounting:

Wall Mount

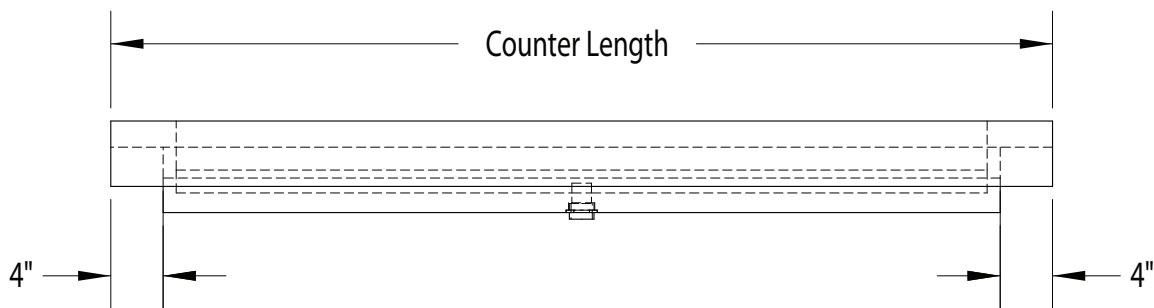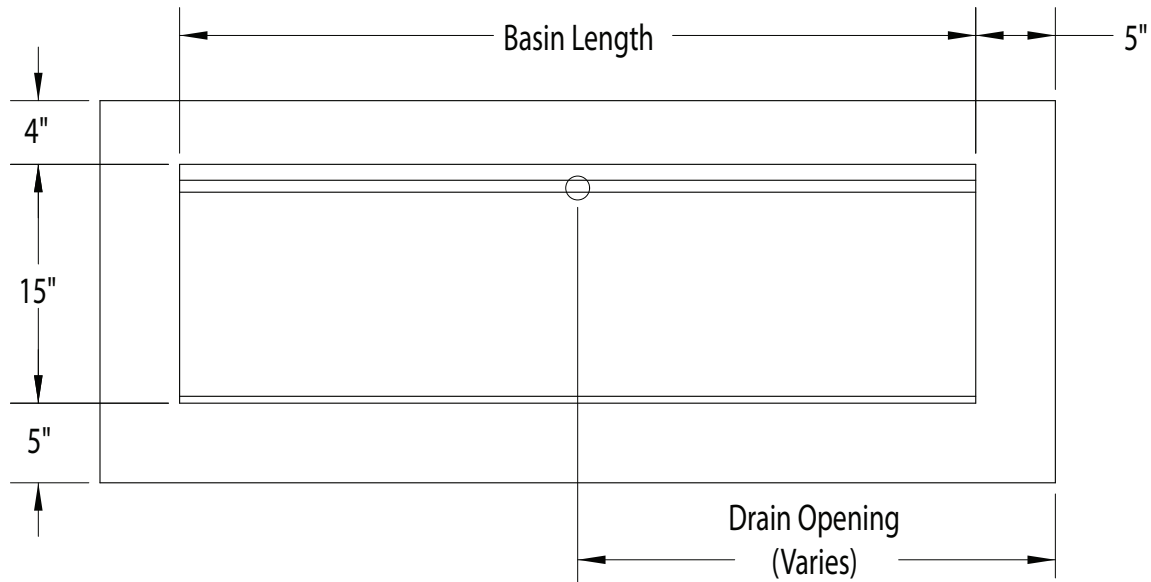

Cleaning:

Most stone care surface cleaners are fine to use on Eko Magnesium Ceramics. You can also use warm water and soap. Harsh, abrasive or acidic cleaning agents should never be used.

EkoLi+ Stain Resistant Treatment:

EkoLi+ is a hybrid surface and subsurface treatment that needs some time to gain stain and water resistance. For the first 7 days after treatment date, dry any surface water and clean staining agents immediately. Prolonged exposure to products that are acidic or have high staining properties must be avoided. Some liquid hand soap and cleaning products actually contain acidic ingredients that, over time, can harm your surface and may void your warranty. Eko Living Elements LLC recommends a paste or spray wax to be applied every month to help protect your EkoLi+ surface treatment.

Color and Material Selections:

- EkoPure (EP)

- Cobblestone Beach EP
- Concrete Gray EP
- Dry Creak EP
- Moonstone Beach EP
- Sage Brook EP
- Sierra Ridge EP
- Sunrise Cove EP
- Sonoma Gold EP
- Titanium White EP

- EkoStone (ES)

- Cobblestone Beach ES
- Concrete Gray ES
- Dry Creak ES
- Moonstone Beach ES
- Sage Brook ES
- Sierra Ridge ES
- Sunrise Cove ES
- Sonoma Gold ES
- Titanium White ES